


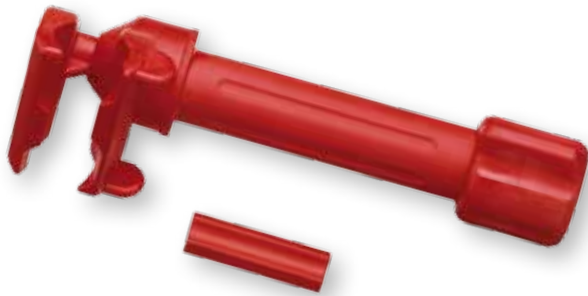

Accessories

ACCESSORIES

**Clamp Device for Screw Connectors**

Gives excellent clamping when screwing on screw connectors with diameters from 14 to 40mm.

Technical Characteristics:

- Can work on live parts with voltages up to 1000V AC and 1500V DC
- Vice clamp system
- Usable with insulated and non-insulated connectors
- Insulated in compliance with IEC 60900/IEC900 Standards
- Tool designed for very low temperature work, down to -40°C

Standards:

- IEC 60900
- IEC 900
- EN10020

Description	Order No.	Dimensions	Weight
Clamp device	2201 3	192 x 65 x 64 mm	350 g

Set Clamp Device for Screw Connectors**Dotazione:**

- Clamp device..... 2201 3
- Insulated Reversible Ratchet Wrench 1/2" 1502 1
- Insulated 12-Point Female Socket 13 1504 113
- Insulated 12-Point Female Socket 17 1504 117
- Insulated 12-Point Female Socket 19 1504 119
- Insulated Male Hex Socket 5 1505 105
- Insulated Male Hex Socket 6 1505 106
- Insulated Male Hex Socket 8 1505 108

Description	Order No.	Dimensions	Weight
Set Clamp Device	2201 0	192 x 140 x 40 mm	1,8 kg

**Set EnerGrip**

- Cable puller for cables Ø 3 - 12 mm

Description	Order No.	Dimensions	Weight
Set EnerGrip (4 pcs.)	AS8902	280 x 95 mm	230 g

ACCESSORIES



Insulated Brush

- for cleaning and dusting
- made of insulating material

Description	Order No.	Length	Weight
Brush 1" angled	5524 01	400 mm	60 mm
Brush 1 1/2" angled	AV4820	400 mm	100 mm
Brush 2" angled	5524 03	410 mm	115 mm
Brush 1" plastic angled	5524 31	400 mm	60 mm
Brush 1 1/2" plastic angled	AV4810	400 mm	70 mm
Brush 2" plastic angled	5524 33	400 mm	90 mm
Brush Head 1" angled	5524 11		10 mm
Brush Head 1 1/2" angled	AV4825		20 mm
Brush Head 2" straight	5524 13		25 mm
Brush Head 1" angled	5524 21		80 mm
Brush Head 1 1/2" angled	5524 22		70 mm
Brush Head 2" angled	5524 23		110 mm
Brush Case (440 mm x 70 mm)	5524 00		50 mm



Light Hammer

- Extremely strong interchangeable polyurethane heads
- Shockproof resin insulation

Description	Order No.	Head	Length	Weight
Light Hammer	4103 22	Ø 25mm	288 mm	200 g
Light Hammer	4103 35	Ø 35mm	300 mm	400 g



Sheath Spreader

- Reinforced polyamide material
- Lightweight model

Description	Order No.	Height	Dimensions	Weight
Sheath spreader	6520 02	30 to 0mm	165 x 20 mm	43 g



Sheath Spreader

- Reinforced polyamide material
- Designed for assembly of branch terminals

Description	Order No.	Height	Dimensions	Weight
Sheath spreader	6520 03	10 to 0mm	170 x 20 mm	100 g



Bordering Chisel

- For NKBA-Cable
- Tape 70 mm with 30 mm Radius
- Non brittle red plastic

Description	Order No.	Diameter	Length	Weight
Bordering Chisel	6540 00	Ø 25 mm	140 mm	63 g

ACCESSORIES

**Angled Mirror**

- Extended plastic handle
- Search mirror Ø 23 mm, flat

Description	Order No.	Handle	Length	Weight
Angled Mirror	1117 99	Ø 8,4 mm	285 mm	16 g

**Welding Mirror**

- Insulated, flexible shaft
- Mirror made of metal foil, mach and edges insulate

Description	Order No.	Joint	Length	Weight
Welding Mirror	5550 00	Ø 14,3 mm	510 mm	316 g
↳ Spare Mirror	5550 01			

**Magnetic Lifter**








- Insulated, flexible shaft
- For removing metal parts from installations

Description	Order No.	Joint	Length	Weight
Magnetic Lifter	1119 00	Ø 13,7 mm	510 mm	330 g

**Universal Key**

- Designed to use in opening and closing electric panels and the most common systems of closure.
- A magnetic attachment for ¼" bit allows utilisation of any insert existing in commerce.
- 5 different profiles of keys

Description	Order No.	Dimensions	Weight
Universal key	QUATTRO	91 x 26 x 15 mm	95 g
Universal key - D	QUATTRO-D	91 x 26 x 15 mm	95 g
Universal key - S	QUATTRO-S	91 x 26 x 15 mm	103 g

Order No.	Additional Bit	Standard Bits			
QUATTRO	 11,5 x 6 mm Triangular Key	 14 x 9 mm Triangular Key insert	 14 x 8 mm Square Key insert	 10 x 6,5 mm 6.3 Bit magnetic Attachment	 14 x 9 x 2 mm 2 x 14 Key Insert
QUATTRO-D	 10 x 7,4 x 2 mm Square Key				
QUATTRO-S	 10 x 7 mm Daimler Benz Key				

intercable

NARZĘDZIA DLA PROFESJONALISTÓW

CUTTING & CRIMPING 12



Intercable srl
Via Campi della Rienza, 21
I-39031 Brunico – ITALY
Tel. +39 0474 - 571700
Fax +39 0474 - 555511
export@intercable.it
www.intercable.eu

Intercable w Polsce
ul. Poznańska 275a
PL - 88-100 Inowrocław
Tel. +48 52 35 37 200
Fax +48 52 35 49 541
biuro@intercable.pl
www.intercable.pl

Intercable nie ponosi odpowiedzialności za szkody wynikające z niewłaściwego użytkowania lub eksploatacji produktów przedstawionych w niniejszym katalogu. Ponadto Intercable zastrzega sobie prawo do zmiany produktów w niniejszym katalogu bez uprzedzenia.